

EPS Code

1245669-2



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	E2000/APC - E2000/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	2m

EPS Code 1242145-5




Product Specifications

Insertion loss	0.25 dB
Return loss	35dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	ST/UPC - LC/UPC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	multimode

Ordering Information

Color	violet
Lenght	5m

EPS Code 1242145-5

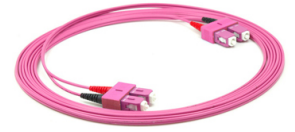

Product Specifications

Insertion loss	0.25 dB
Return loss	35dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	ST/UPC - LC/UPC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	multimode

Ordering Information

Color	violet
Lenght	5m

EPS Code

1241445-3



Product Specifications

Insertion loss	0.25 dB
Return loss	35dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	LC/UPC - LC/UPC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	multimode

Ordering Information

Color	aqua
Lenght	3m

EPS Code 1245341-2



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	SC/PC - LC/PC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	2m

EPS Code 1245669-1



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	E2000/APC - E2000/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	1m

EPS Code 1245669-3



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	E2000/APC - E2000/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	3m

EPS Code

1245669-4



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	E2000/APC - E2000/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	4m

EPS Code 1245669-5




Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	E2000/APC - E2000/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	5m

EPS Code 1249669-3




Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	E2000/APC - E2000/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	3m

EPS Code 1245648-1

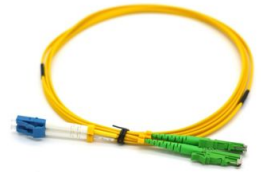

Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	E2000/APC - LC/UPC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	1m

EPS Code 1245648-2



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	E2000/APC - LC/UPC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	2m

EPS Code

1245639-2



Product Specifications


Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	E2000/APC - SC/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	2m

EPS Code

1245639-5

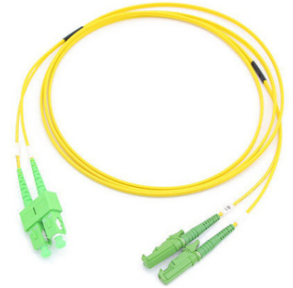

Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	E2000/APC - SC/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	5m

EPS Code 1249639-3


Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	E2000/APC - SC/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	3m

EPS Code 1245637-5

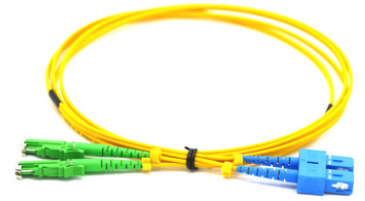


Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	E2000/APC - SC/PC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	5m

EPS Code 1245638-2

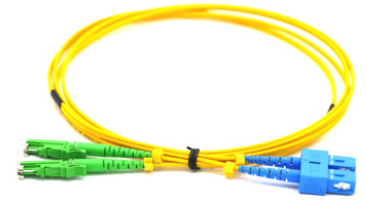

Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	E2000/APC - SC/UPC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	2m

EPS Code 1245641-2




Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	E2000/PC - LC/PC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	2m

EPS Code 1245641-3

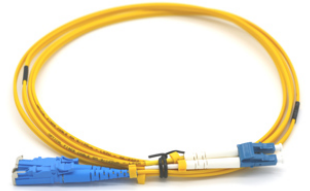

Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	E2000/PC - LC/PC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	3m

EPS Code 1245635-5

Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	E2000/UPC - SC/UPC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	5m

EPS Code 1245269-2

Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	FC/APC - E2000/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	1m

EPS Code 1249269-2

Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	FC/APC - E2000/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	2m

EPS Code 1249269-5

Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	FC/APC - E2000/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	5m

EPS Code

1245229-1



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	FC/APC - FC/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	1m

EPS Code

1245229-2



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	FC/APC - FC/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	2m

EPS Code 1245229-3



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	FC/APC - FC/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	3m

EPS Code

1245229-4



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	FC/APC - FC/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	4m

EPS Code 1245269-3

Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	FC/APC - SC/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	3m

EPS Code 1249239-3

Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	FC/APC - SC/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	3m

EPS Code

1245263-2



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	FC/PC - E2000/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	2m

EPS Code 1245263-4



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	FC/PC - E2000/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	4m

EPS Code

1245263-5



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	FC/PC - E2000/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	5m

EPS Code 1245221-2



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	FC/PC - FC/PC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	2m

EPS Code 1245241-4



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	FC/PC - LC/PC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	4m

EPS Code 1245241-2



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	FC/PC - LC/PC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	2m

EPS Code 1249233-3

Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	FC/PC - SC/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	3m

EPS Code

1245231-2



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	FC/PC - SC/PC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	2m

EPS Code

1245231-4



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	FC/PC - SC/PC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	4m

EPS Code

1245231-5



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	FC/PC - SC/PC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	5m

EPS Code 1245235-2




Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	FC/UPC - SC/UPC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	2m

EPS Code 1245463-1

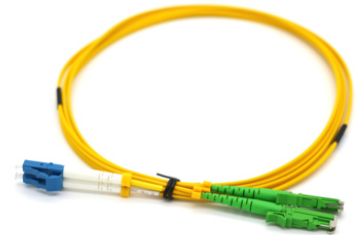


Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	LC/PC - E2000/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	1m

EPS Code 1245463-2

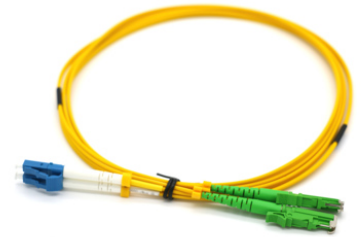


Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	LC/PC - E2000/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	2m

EPS Code 1245463-4

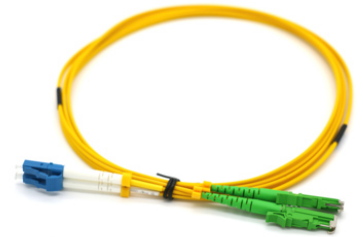


Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	LC/PC - E2000/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	4m

EPS Code 1245463-5

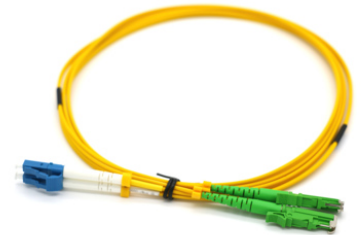

Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	LC/PC - E2000/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	5m

EPS Code

1245441-2



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	LC/PC - LC/PC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	2m

EPS Code 1245441-4



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	LC/PC - LC/PC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	4m

EPS Code 1245433-4



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	LC/PC - SC/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	4m

EPS Code 1245433-5



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	LC/PC - SC/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	5m

EPS Code 1245433-3



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	LC/PC - SC/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	3m

EPS Code

1241445-2



Product Specifications

Insertion loss	0.25 dB
Return loss	35dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	LC/UPC - LC/UPC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	multimode

Ordering Information

Color	aqua
Lenght	2m

EPS Code

1241445-3



Product Specifications

Insertion loss	0.25 dB
Return loss	35dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	LC/UPC - LC/UPC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	multimode

Ordering Information

Color	aqua
Lenght	3m

EPS Code 1242445-1



Product Specifications

Insertion loss	0.25 dB
Return loss	35dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	LC/UPC - LC/UPC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	multimode

Ordering Information

Color	violet
Lenght	1m

EPS Code

1242445-2



Product Specifications

Insertion loss	0.25 dB
Return loss	35dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	LC/UPC - LC/UPC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	multimode

Ordering Information

Color	violet
Lenght	2m

EPS Code

1242445-3



Product Specifications

Insertion loss	0.25 dB
Return loss	35dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	LC/UPC - LC/UPC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	multimode

Ordering Information

Color	violet
Lenght	3m

EPS Code 1242445-5



Product Specifications

Insertion loss	0.25 dB
Return loss	35dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	LC/UPC - LC/UPC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	multimode

Ordering Information

Color	violet
Lenght	5m

EPS Code

1242445-0.5



Product Specifications

Insertion loss	0.25 dB
Return loss	35dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	LC/UPC - LC/UPC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	multimode

Ordering Information

Color	violet
Lenght	0.5m

EPS Code 1245445-1



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	LC/UPC - LC/UPC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	1m

EPS Code 1245445-2



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	LC/UPC - LC/UPC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	2m

EPS Code 1245445-5



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	LC/UPC - LC/UPC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	5m

EPS Code 1245435-3



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	LC/UPC - SC/UPC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	3m

EPS Code 1245363-2



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	SC/PC - E2000/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	2m

EPS Code

1245341-2



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	SC/PC - LC/PC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	2m

EPS Code 1249333-1



Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	SC/PC - SC/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

Ordering Information

Color	yellow
Lenght	1m

EPS Code

1242345-1



Product Specifications

Insertion loss	0.25 dB
Return loss	35dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	SC/UPC - LC/UPC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	multimode

Ordering Information

Color	violet
Lenght	1m

EPS Code

1242345-2



Product Specifications

Insertion loss	0.25 dB
Return loss	35dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	SC/UPC - LC/UPC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	multimode

Ordering Information

Color	violet
Lenght	2m

EPS Code 1242335-1




Product Specifications

Insertion loss	0.25 dB
Return loss	35dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	SC/UPC - SC/UPC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	multimode

Ordering Information

Color	violet
Lenght	1m

EPS Code 1242335-2

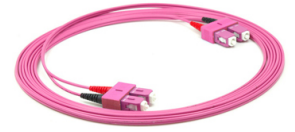

Product Specifications

Insertion loss	0.25 dB
Return loss	35dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	SC/UPC - SC/UPC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	multimode

Ordering Information

Color	violet
Lenght	2m

EPS Code 1242145-5



Product Specifications

Insertion loss	0.25 dB
Return loss	35dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	ST/UPC - LC/UPC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	multimode

Ordering Information

Color	violet
Lenght	5m