

EPS Code 1013111



Product Specifications

Product Type	RJ45 patch panel
Installation Temperature	-10 °C to +60 °C
ANSI-TIA Category	n/a
Cable type	unshielded
Installation temperature	-10 °C to +60 °C
Rack unit	1
Total ports	24
ROHS compliant	yes
Wiring	T568A/T568B
IDC accept	22-26 AWG
Housing	High-impact Flame Retardant Polycarbonate,UL94V-1
Dielectric Withstand Voltage	n/a

Ordering Information

Color	black
Packaging Quantity	1

EPS Code 1013211

Product Specifications

Product Type	rack
Installation Temperature	-10 °C to +60 °C
ANSI-TIA Category	n/a
Cable type	n/a
Installation temperature	-10 °C to +60 °C
Rack unit	1
Total ports	0
ROHS compliant	yes
Wiring	n/a
IDC accept	n/a
Housing	plastic
Dielectric Withstand Voltage	n/a

Ordering Information

Color	black
Packaging Quantity	1

EPS Code

1012121



Product Specifications

Product Type	Modular Jack
Installation Temperature	-60 °C to +80 °C
ANSI-TIA Category	6
Cable type	unshielded
Installation temperature	-60 °C to +80 °C
Rack unit	n/a
Total ports	n/a
ROHS compliant	yes
Wiring	T568A/T568B
IDC accept	22-26 AWG
Housing	High-impact Flame Retardant Polycarbonate, UL94V-0
Dielectric Withstand Voltage	150 VAC

Ordering Information

Color	black/white
Packaging Quantity	1

EPS Code 1012111



Product Specifications

Product Type	Modular Jack
Installation Temperature	-60 °C to +80 °C
ANSI-TIA Category	5e
Cable type	unshielded
Installation temperature	-60 °C to +80 °C
Rack unit	n/a
Total ports	n/a
ROHS compliant	yes
Wiring	T568A/T568B
IDC accept	22-26 AWG
Housing	High-impact Flame Retardant Polycarbonate,UL94V-0
Dielectric Withstand Voltage	150 VAC

Ordering Information

Color	white
Packaging Quantity	1

EPS Code 1035252



Product Specifications

Product Type	rack
Installation Temperature	-10 °C to +60 °C
ANSI-TIA Category	n/a
Cable type	n/a
Installation temperature	-10 °C to +60 °C
Rack unit	2
Total ports	0
ROHS compliant	yes
Wiring	n/a
IDC accept	n/a
Housing	metal
Dielectric Withstand Voltage	n/a

Ordering Information

Color	black
Packaging Quantity	1

EPS Code 1015111



Product Specifications

Product Type	box
Installation Temperature	n/a
ANSI-TIA Category	n/a
Cable type	n/a
Installation temperature	n/a
Rack unit	n/a
Total ports	1
ROHS compliant	yes
Wiring	n/a
IDC accept	n/a
Housing	abs
Dielectric Withstand Voltage	n/a

Ordering Information

Color	white
Packaging Quantity	1

EPS Code 1035152



Product Specifications

Product Type	rack
Installation Temperature	-10 °C to +60 °C
ANSI-TIA Category	n/a
Cable type	n/a
Installation temperature	-10 °C to +60 °C
Rack unit	1
Total ports	0
ROHS compliant	yes
Wiring	n/a
IDC accept	n/a
Housing	metal
Dielectric Withstand Voltage	n/a

Ordering Information

Color	black
Packaging Quantity	1

EPS Code

1031121



Product Specifications

Product Type	rack
Installation Temperature	-10 °C to +60 °C
ANSI-TIA Category	n/a
Cable type	n/a
Installation temperature	-10 °C to +60 °C
Rack unit	1
Total ports	0
ROHS compliant	yes
Wiring	n/a
IDC accept	n/a
Housing	plastic
Dielectric Withstand Voltage	n/a

Ordering Information

Color	black
Packaging Quantity	1

EPS Code 1013212



Product Specifications

Product Type	rack
Installation Temperature	-10 °C to +60 °C
ANSI-TIA Category	n/a
Cable type	n/a
Installation temperature	-10 °C to +60 °C
Rack unit	1
Total ports	0
ROHS compliant	yes
Wiring	n/a
IDC accept	n/a
Housing	metal
Dielectric Withstand Voltage	n/a

Ordering Information

Color	black
Packaging Quantity	1

EPS Code

1031132



Product Specifications

Product Type	rack
Installation Temperature	-10 °C to +60 °C
ANSI-TIA Category	n/a
Cable type	n/a
Installation temperature	-10 °C to +60 °C
Rack unit	1
Total ports	0
ROHS compliant	yes
Wiring	n/a
IDC accept	n/a
Housing	metal
Dielectric Withstand Voltage	n/a

Ordering Information

Color	black
Packaging Quantity	1

EPS Code 1013121



Product Specifications

Product Type	RJ45 patch panel
Installation Temperature	-10 °C to +60 °C
ANSI-TIA Category	5e
Cable type	unshielded
Installation temperature	-10 °C to +60 °C
Rack unit	1
Total ports	24
ROHS compliant	yes
Wiring	T568B
IDC accept	22-26 AWG
Housing	pbt
Dielectric Withstand Voltage	n/a

Ordering Information

Color	black
Packaging Quantity	1

EPS Code 1012231




Product Specifications

Product Type	Modular Jack
Installation Temperature	-60 °C to +80 °C
ANSI-TIA Category	6A
Cable type	shielded
Installation temperature	-60 °C to +80 °C
Rack unit	n/a
Total ports	n/a
ROHS compliant	yes
Wiring	T568A/T568B
IDC accept	22-26 AWG
Housing	High-impact Flame Retardant Polycarbonate,UL94V-0
Dielectric Withstand Voltage	150 VAC

Ordering Information

Color	grey
Packaging Quantity	1

EPS Code 1012281




Product Specifications

Product Type	Modular Jack
Installation Temperature	-40 °C to +70 °C
ANSI-TIA Category	6A
Cable type	shielded
Installation temperature	-40 °C to +70 °C
Rack unit	n/a
Total ports	n/a
ROHS compliant	yes
Wiring	T568A/T568B
IDC accept	22-26 AWG
Housing	Policarbonate, UL94V-0
Dielectric Withstand Voltage	150 VAC

Ordering Information

Color	grey
Packaging Quantity	1

EPS Code 1012131

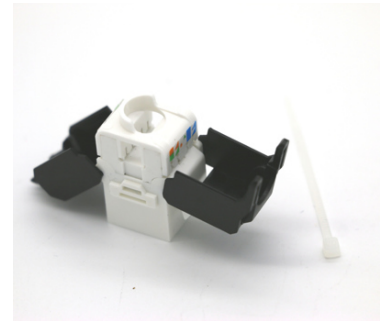

Product Specifications

Product Type	Modular Jack
Installation Temperature	-60 °C to +80 °C
ANSI-TIA Category	6A
Cable type	unshielded
Installation temperature	-60 °C to +80 °C
Rack unit	n/a
Total ports	n/a
ROHS compliant	yes
Wiring	T568A/T568B
IDC accept	22-26 AWG
Housing	High-impact Flame Retardant Polycarbonate,UL94V-0
Dielectric Withstand Voltage	150 VAC

Ordering Information

Color	black/white
Packaging Quantity	1

EPS Code 1016231



Product Specifications

Product Type	plug
Installation Temperature	-10 °C to +60 °C
ANSI-TIA Category	6A
Cable type	shielded
Installation temperature	-10 °C to +60 °C
Rack unit	n/a
Total ports	n/a
ROHS compliant	yes
Wiring	T568A/T568B
IDC accept	23-26 AWG
Housing	zink die casting with nickel plated
Dielectric Withstand Voltage	250 VAC

Ordering Information

Color	grey
Packaging Quantity	1

EPS Code

1016121



Product Specifications

Product Type	plug
Installation Temperature	-10 °C to +60 °C
ANSI-TIA Category	6A
Cable type	unshielded
Installation temperature	-10 °C to +60 °C
Rack unit	n/a
Total ports	n/a
ROHS compliant	yes
Wiring	T568A/T568B
IDC accept	23-26 AWG
Housing	zink die casting with nickel plated
Dielectric Withstand Voltage	250 VAC

Ordering Information

Color	grey
Packaging Quantity	1

EPS Code 1015111



Product Specifications

Product Type	box
Installation Temperature	n/a
ANSI-TIA Category	n/a
Cable type	n/a
Installation temperature	n/a
Rack unit	n/a
Total ports	1
ROHS compliant	yes
Wiring	n/a
IDC accept	n/a
Housing	abs
Dielectric Withstand Voltage	n/a

Ordering Information

Color	white
Packaging Quantity	1

EPS Code 1015121



Product Specifications

Product Type	box
Installation Temperature	n/a
ANSI-TIA Category	n/a
Cable type	n/a
Installation temperature	n/a
Rack unit	n/a
Total ports	2
ROHS compliant	yes
Wiring	n/a
IDC accept	n/a
Housing	abs
Dielectric Withstand Voltage	n/a

Ordering Information

Color	white
Packaging Quantity	1

EPS Code

1015241



Product Specifications


Product Type	outlet
Installation Temperature	n/a
ANSI-TIA Category	n/a
Cable type	n/a
Installation temperature	n/a
Rack unit	n/a
Total ports	2
ROHS compliant	yes
Wiring	n/a
IDC accept	n/a
Housing	plastic
Dielectric Withstand Voltage	n/a

Ordering Information

Color	white
Packaging Quantity	1

EPS Code

1015231



Product Specifications

Product Type	outlet
Installation Temperature	n/a
ANSI-TIA Category	n/a
Cable type	n/a
Installation temperature	n/a
Rack unit	n/a
Total ports	2
ROHS compliant	yes
Wiring	n/a
IDC accept	n/a
Housing	plastic
Dielectric Withstand Voltage	n/a

Ordering Information

Color	white
Packaging Quantity	1

EPS Code

1012125



Product Specifications

Product Type	plug
Installation Temperature	0 °C to +60 °C
ANSI-TIA Category	6
Cable type	unshielded
Installation temperature	0 °C to +60 °C
Rack unit	n/a
Total ports	n/a
ROHS compliant	yes
Wiring	T568A/T568B
IDC accept	23-26 AWG
Housing	plastic
Dielectric Withstand Voltage	150 VAC

Ordering Information

Color	white
Packaging Quantity	1

EPS Code

1015311



Product Specifications

Product Type	Faceplate kit
Installation Temperature	n/a
ANSI-TIA Category	n/a
Cable type	n/a
Installation temperature	n/a
Rack unit	n/a
Total ports	n/a
ROHS compliant	yes
Wiring	n/a
IDC accept	n/a
Housing	polycarbonate
Dielectric Withstand Voltage	n/a

Ordering Information

Color	white
Packaging Quantity	1

EPS Code 1013112



Product Specifications

Product Type	RJ45 patch panel
Installation Temperature	-10 °C to +60 °C
ANSI-TIA Category	n/a
Cable type	shielded
Installation temperature	-10 °C to +60 °C
Rack unit	1
Total ports	24
ROHS compliant	yes
Wiring	T568A/T568B
IDC accept	22-26 AWG
Housing	High-impact Flame Retardant Polycarbonate,UL94V-0
Dielectric Withstand Voltage	n/a

Ordering Information

Color	black
Packaging Quantity	1