

EPS Code 101310142

Product Specifications


Product Type	Twisted pair cable
ANSI TIA Category	5e
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	shielded
Nom OD and gauge	24 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	0 °C to +50 °C
Cable Type	shielded
Stealth Material	PVC

Ordering Information

Color	white
Packing Length	305m
Packaging Quantity	box

EPS Code

101045232



Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	7
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	shielded
Nom OD and gauge	23 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	-20 °C to +60 °C
Cable Type	shielded
Stealth Material	LSOH

Ordering Information

Color	blue
Packing Length	500m
Packaging Quantity	reel

EPS Code

101120232



Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	6
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	unshielded
Nom OD and gauge	23 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	0 °C to +50 °C
Cable Type	unshielded
Stealth Material	LSOH

Ordering Information

Color	blue
Packing Length	500m
Packaging Quantity	reel

EPS Code 1011111



Product Specifications


Product Type	Twisted pair cable
ANSI TIA Category	5e
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	unshielded
Nom OD and gauge	26 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	0 °C to +50 °C
Cable Type	unshielded
Stealth Material	PVC

Ordering Information

Color	blue
Packing Length	305m
Packaging Quantity	box

EPS Code

101045232



Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	7
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	shielded
Nom OD and gauge	23 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	-20 °C to +60 °C
Cable Type	shielded
Stealth Material	LSOH

Ordering Information

Color	blue
Packing Length	500m
Packaging Quantity	reel

EPS Code 101110141



Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	5e
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	unshielded
Nom OD and gauge	24 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	0 °C to +50 °C
Cable Type	unshielded
Stealth Material	PVC

Ordering Information

Color	blue
Packing Length	305m
Packaging Quantity	box

EPS Code 101110151



Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	5e
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	unshielded
Nom OD and gauge	25 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	0 °C to +50 °C
Cable Type	unshielded
Stealth Material	PVC

Ordering Information

Color	blue
Packing Length	305m
Packaging Quantity	box

EPS Code 101120141



Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	6
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	unshielded
Nom OD and gauge	24 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	0 °C to +50 °C
Cable Type	unshielded
Stealth Material	PVC

Ordering Information

Color	blue
Packing Length	305m
Packaging Quantity	box

EPS Code 1011332




Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	6A
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	shielded
Nom OD and gauge	23 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	-20 °C to +60 °C
Cable Type	shielded
Stealth Material	LSOH

Ordering Information

Color	blue
Packing Length	500m
Packaging Quantity	reel

EPS Code 101230232



Product Specifications


Product Type	Twisted pair cable
ANSI TIA Category	6A
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	shielded
Nom OD and gauge	23 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	-20 °C to +60 °C
Cable Type	shielded
Stealth Material	LSOH

Ordering Information

Color	blue
Packing Length	500m
Packaging Quantity	reel

EPS Code

101045232




Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	7
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	shielded
Nom OD and gauge	23 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	-20 °C to +60 °C
Cable Type	shielded
Stealth Material	LSOH

Ordering Information

Color	blue
Packing Length	500m
Packaging Quantity	reel

EPS Code 1011552



Product Specifications


Product Type	Twisted pair cable
ANSI TIA Category	7A
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	shielded
Nom OD and gauge	23 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	-20 °C to +60 °C
Cable Type	shielded
Stealth Material	LSOH

Ordering Information

Color	blue
Packing Length	500m
Packaging Quantity	reel

EPS Code

101055232



Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	7A
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	shielded
Nom OD and gauge	23 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	-20 °C to +60 °C
Cable Type	shielded
Stealth Material	LSOH

Ordering Information

Color	blue
Packing Length	500m
Packaging Quantity	reel

EPS Code 1011322



Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	6
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	shielded
Nom OD and gauge	23 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	-20 °C to +60 °C
Cable Type	shielded
Stealth Material	LSOH

Ordering Information

Color	blue
Packing Length	500m
Packaging Quantity	reel

EPS Code 101110141



Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	5e
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	unshielded
Nom OD and gauge	24 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	0 °C to +50 °C
Cable Type	unshielded
Stealth Material	PVC

Ordering Information

Color	blue
Packing Length	305m
Packaging Quantity	box

EPS Code 101110151



Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	5e
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	unshielded
Nom OD and gauge	25 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	0 °C to +50 °C
Cable Type	unshielded
Stealth Material	PVC

Ordering Information

Color	blue
Packing Length	305m
Packaging Quantity	box

EPS Code 1011322

Product Specifications


Product Type	Twisted pair cable
ANSI TIA Category	6
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	shielded
Nom OD and gauge	23 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	0 °C to +50 °C
Cable Type	shielded
Stealth Material	LSOH

Ordering Information

Color	blue
Packing Length	500m
Packaging Quantity	reel

EPS Code

101120232



Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	6
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	unshielded
Nom OD and gauge	23 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	0 °C to +50 °C
Cable Type	unshielded
Stealth Material	LSOH

Ordering Information

Color	blue
Packing Length	500m
Packaging Quantity	reel

EPS Code 1011121



Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	6
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	unshielded
Nom OD and gauge	24 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	0 °C to +50 °C
Cable Type	unshielded
Stealth Material	LSOH

Ordering Information

Color	blue
Packing Length	305m
Packaging Quantity	box

EPS Code 1011122



Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	6
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	unshielded
Nom OD and gauge	24 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	0 °C to +50 °C
Cable Type	unshielded
Stealth Material	LSOH

Ordering Information

Color	blue
Packing Length	500m
Packaging Quantity	reel

EPS Code 101120542



Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	6
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	unshielded
Nom OD and gauge	24 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	-20 °C to +60 °C
Cable Type	unshielded
Stealth Material	PVC

Ordering Information

Color	black
Packing Length	500m
Packaging Quantity	reel

EPS Code 101120141



Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	6
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	unshielded
Nom OD and gauge	24 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	0 °C to +50 °C
Cable Type	unshielded
Stealth Material	PVC

Ordering Information

Color	blue
Packing Length	305m
Packaging Quantity	box

EPS Code 1011432



Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	6A
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	shielded
Nom OD and gauge	23 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	-20 °C to +60 °C
Cable Type	shielded
Stealth Material	LSOH

Ordering Information

Color	blue
Packing Length	500m
Packaging Quantity	reel

EPS Code 1011436



Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	6A
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	shielded
Nom OD and gauge	23 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	-20 °C to +60 °C
Cable Type	shielded
Stealth Material	LSOH

Ordering Information

Color	blue
Packing Length	500m
Packaging Quantity	reel

EPS Code 1011332




Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	6A
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	shielded
Nom OD and gauge	23 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	-20 °C to +60 °C
Cable Type	shielded
Stealth Material	LSOH

Ordering Information

Color	blue
Packing Length	500m
Packaging Quantity	reel

EPS Code 101230232




Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	6A
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	shielded
Nom OD and gauge	23 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	-20 °C to +60 °C
Cable Type	shielded
Stealth Material	LSOH

Ordering Information

Color	blue
Packing Length	500m
Packaging Quantity	reel

EPS Code 1011136

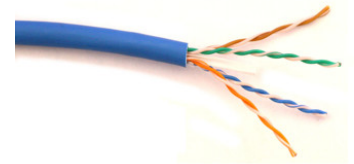


Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	6A
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	unshielded
Nom OD and gauge	23 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	-20 °C to +60 °C
Cable Type	unshielded
Stealth Material	LSOH

Ordering Information

Color	blue
Packing Length	500m
Packaging Quantity	reel

EPS Code 1011132



Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	6A
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	unshielded
Nom OD and gauge	23 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	-20 °C to +60 °C
Cable Type	unshielded
Stealth Material	LSOH

Ordering Information

Color	blue
Packing Length	500m
Packaging Quantity	reel

EPS Code

101045232




Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	7
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	shielded
Nom OD and gauge	23 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	-20 °C to +60 °C
Cable Type	shielded
Stealth Material	LSOH

Ordering Information

Color	blue
Packing Length	500m
Packaging Quantity	reel

EPS Code 1011552



Product Specifications


Product Type	Twisted pair cable
ANSI TIA Category	7A
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	shielded
Nom OD and gauge	23 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	-20 °C to +60 °C
Cable Type	shielded
Stealth Material	LSOH

Ordering Information

Color	blue
Packing Length	500m
Packaging Quantity	reel

EPS Code

101055232



Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	7A
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	shielded
Nom OD and gauge	23 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	-20 °C to +60 °C
Cable Type	shielded
Stealth Material	LSOH

Ordering Information

Color	blue
Packing Length	500m
Packaging Quantity	reel

EPS Code 101110551



Product Specifications

Product Type	Twisted pair cable
ANSI TIA Category	5e
Test Standard	ISO/IEC 11801, TIA-568-2.D
Cable Type	unshielded
Nom OD and gauge	25 AWG
Insulation Material	polyolefin
ROHS compliant	yes
Installation temperature	-20 °C to +60 °C
Cable Type	unshielded
Stealth Material	PVC

Ordering Information

Color	black
Packing Length	305m
Packaging Quantity	box